

Plastic APC Laser Module LMAPCD-650-06

650nm Laser Module


Features

1. APC (auto power control) IC inside
2. High quality PC lens
3. Low current consumption of the APC circuit
4. Superior laser beam profile



Part No. Indications:

LMAPCD -650 -06 -XX -A

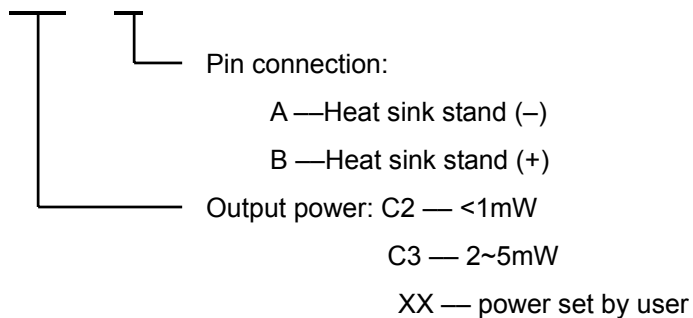

Absolute maximum ratings


Item	Symbol	Rating	Unit
Power supply voltage	V_{cc}	3.3	V
Laser Module optical output power	P_o	<3mW	mW
Operation temperature	T_{opr}	0~40	°C
Storage temperature	T_{stg}	0~60	°C

Electrical and optical characteristics ($T_c=25^\circ\text{C}$)


Item	Symbol	Min.	Typ.	Max	Unit	Condition	
Wavelength		645	655	660	nm	$P_o < 3\text{mW}$	
Output power	P_{out}	C2	-	0.6	0.9	mW	$V_{cc}=3\text{V}$
		C3	2.2	-	3.0	mW	$V_{cc}=3\text{V}$
Operation current	I_{op}	-	15	25	mA	$P_o=3\text{mW}$ $V_{cc}=3\text{V}$	
Operation voltage	V_{op}	2.5	-	3.3	Volt		
Laser Beam spot size at 10m		<10mm					
Divergence angle		1.1 mrad					
Mean time to failure (MTTF) 3mW 25°C		>10000 hrs					

Plastic APC Laser Module LMAPCD-650-06


Outline dimensions (Units: mm)

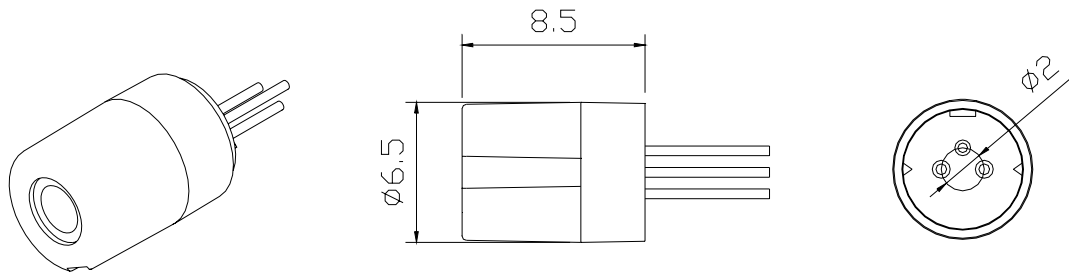

PIN Assignment:



A type : Heat sink stand (-)



B type :Heat sink stand (+)

Pin 1 : Vcc

Pin 2 : GND

Pin 3 : (1) PD

for LMAPCD-650-06 -XX-A/B


(2) NC (no external connection)

for LMAPCD-650-06 -C2/C3-A/B

Plastic APC Laser Module LMAPCD-650-06

Laser power Adjustment Procedure

1. Connect 1 uF capacitor (Cx1) between Pin1 and Pin2.
2. Connect 20~50K ohm variable resistor (Rx1) between Pin2 and Pin3.
3. Set Vcc to the designed value.
4. Adjust Rx1 to obtain the desired output power.
5. Laser Safety Precautions

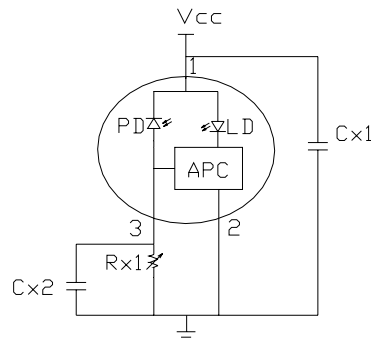

- (1) Do not increase Vcc value when the laser module is working near the maximum power. That is to protect laser from overdriving condition and make sure power is under 3 mW.
- (2) Do not operate the device above the maximum rating condition, even momentarily. It may cause unexpected permanent damage to the device.

Laser power stability

P1 : 3mW


P2 : < 3.5mW

Pn : < 3.5mW

ΔP : < 0.5mW

T1 : < 0.1us

$f_2 = (1/T_2)$: 3MHz

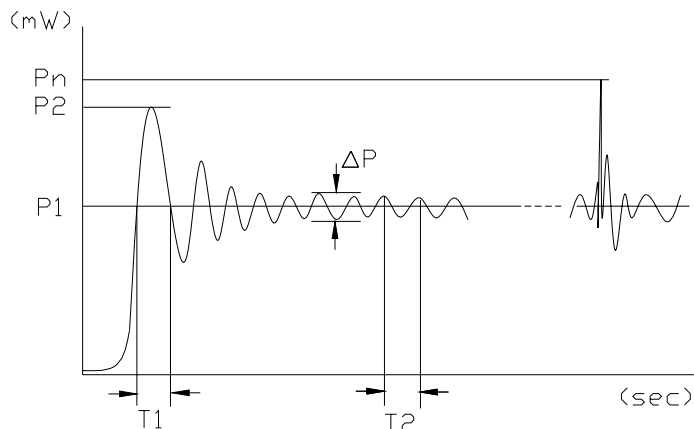

NOTE:

P1 : Mean power

P2 : Max power from turning on power

Pn : Max power from Vcc noise

ΔP : Power Amplitude of vibration

T1 : Time between trigger and convergence


$f_2 = (1/T_2)$: Frequency of output power

Plastic APC Laser Module LMAPCD-650-06



Instruction manual

1. DC Power connection mode 1



A type : Heat sink stand (-)

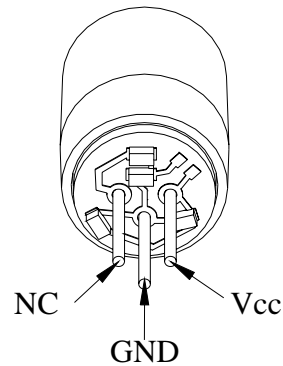

B type :Heat sink stand (+)

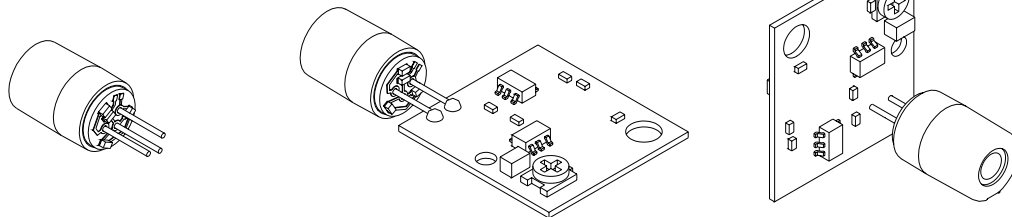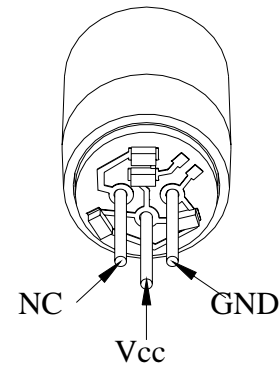

2. DC Power connection mode 2

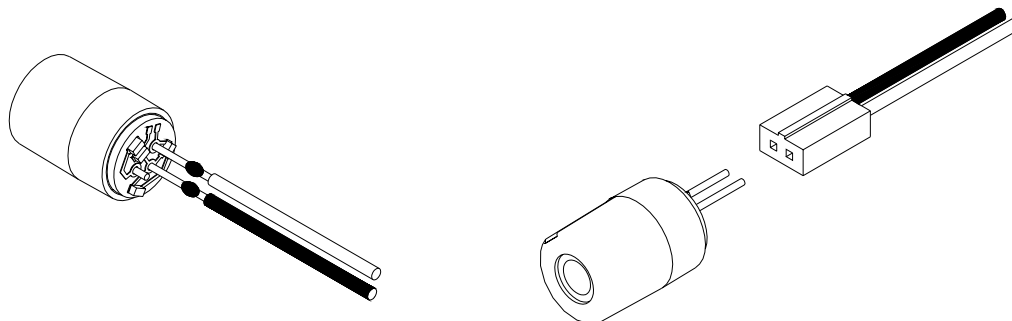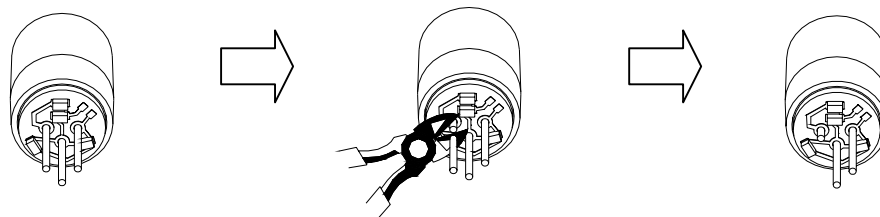

Laser Safety Precautions

1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical Lens is made of plastic or glass. Do not contaminate lens by soiling, oil or chemical.